


DASH D – Surface (S)




DASH D – Recessed (R)




DASH D – Suspended (SP)

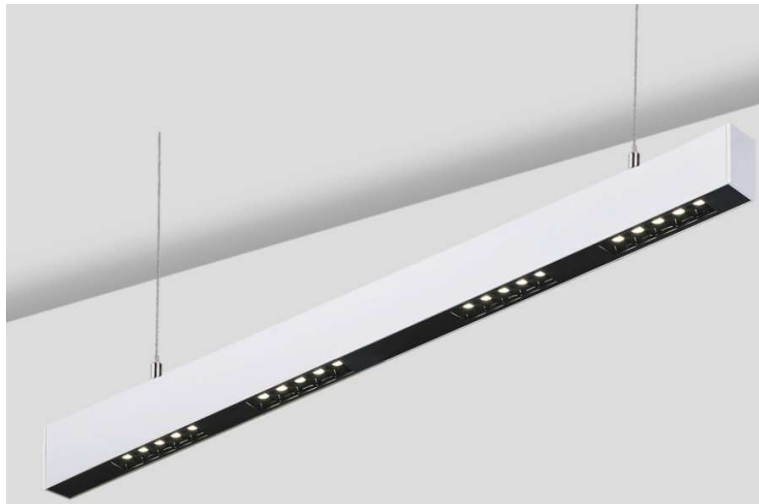

Mounting Options



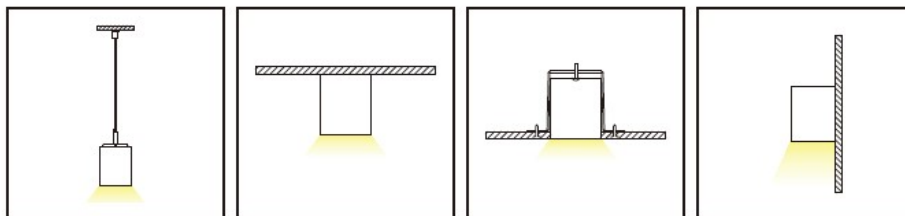


TECHNICAL DATA

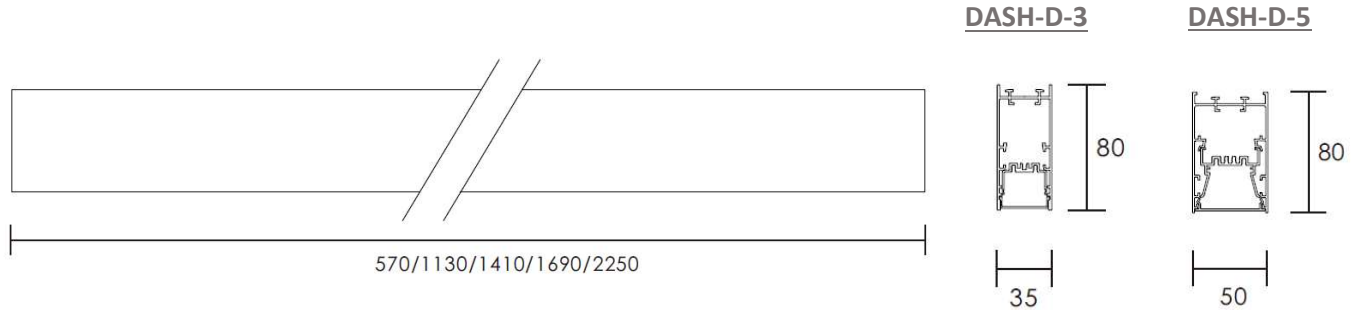

Length (mm)	Wattage	Luminous Flux			
		2700K	3000K	4000K	6000K
570	10W	940	1000	1040	1080
1130	20W	1840	1900	1950	2000
1410	30W	2920	2980	3020	3060
1690	30W	2920	2980	3020	3060
2250	40W	3840	3880	3910	3960

ACCESSORIES



<i>Luminous Efficacy</i>	> 90lm/W
<i>SDCM</i>	<3
<i>CRI</i>	>83/93
<i>Beam Angle</i>	12° / 24° / 38° / 50° / 50X50° / 35X75° / ASY
<i>Power Factor</i>	>0.95
<i>Working Voltage</i>	220-240V AC, 50/60Hz
<i>LED Driver</i>	Integral
<i>Control</i>	Switched / 0-10V / DALI / Tunable White
<i>Body Material</i>	Extruded Aluminium
<i>Optics</i>	Modular PMMA Lens
<i>IP Rating</i>	IP40
<i>Working Temperature</i>	-20°C to 40°C
<i>Rated Life</i>	50,000Hrs (L70)

ORDER INFORMATION

Product Code	Width	Length	Wattage	X	YY	Z
BLU-DASH-D	3 – 35mm	57 – 570mm	10W	8 - CRI 83+	27 -2700K	S - Surface
	5 – 50mm	113 – 1130mm	20W	9 - CRI 93+	30 -3000K	R - Recessed
		141 – 1410mm	30W		40 -4000K	SP - Suspended
		169 – 1690mm	30W		60 -6000K	
		225 – 2250mm	40W			

Example: BLU-DASH-D-3-57-10W-827-S

Specification subject to change without notice