
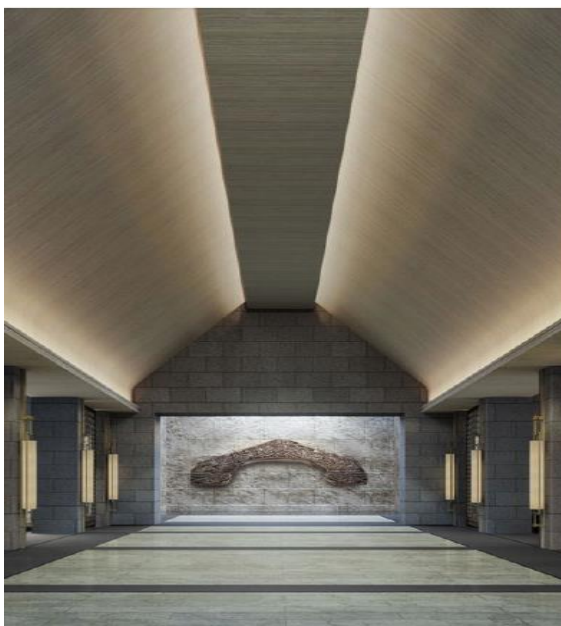


Flex-i UHE

Ultra-High Efficiency Flexible Strip



TECHNICAL DATA

Wattage	2500K	2700K	3000K	4000K	6000K
4.8W	840	850	860	870	880
7.2W	1260	1270	1280	1290	1300
9.6W	1680	1690	1700	1710	1720
14.4W	2520	2530	2540	2550	2560
19.2W	3360	3370	3380	3390	3400

Luminous Efficacy	>175 lm/W
SDCM	< 3
CRI	>83 / 93
Beam Angle	120°
Working Voltage	24 VDC
LED Driver	Remote
Control	Switched / 0-10 / DALI
Body Material	Epoxy IP65, Silicone IP67
Optics	No secondary optics
IP Rating	IP20/IP65/IP67/IP68
Working Temperature	-20°C to 50°C
Rated Life	50,000Hrs (L70)

ORDER INFORMATION

Product Code	X	YY	ZZ
BLU-FLEXI-UHE-4.8W	8 - CRI 83+	25 - 2500K	IP20 - IP20
BLU-FLEXI-UHE-7.2W	9 - CRI 93+	27 - 2700K	IP65 - IP65
BLU-FLEXI-UHE-9.6W		30 - 3000K	IP67 - IP67
BLU-FLEXI-UHE-14.4W		40 - 4000K	IP68 - IP68
BLU-FLEXI-UHE-19.2W		60 - 6000K	

Example: BLU-FLEXI-UHE-4.8W-827-IP20



ONE
BIN
ONLY

Specification subject to change without notice