


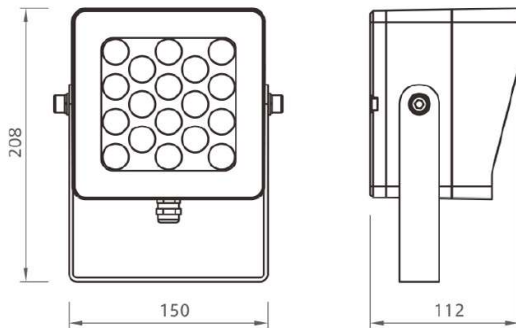

TECHNICAL DATA

Wattage	Luminous Flux			
	2700K	3000K	4000K	6000K
15W	1215	1240	1265	1290
20W	1620	1645	1670	1700
26W	2115	2145	2175	2200
36W	3275	3300	3325	3350

Luminous Efficacy	>80 lm/W
SDCM	<3
CRI	>83/93
Beam Angle	4° / 10° / 15° / 20° / 30° / 60°
Input Voltage	220-240VAC, 50/60Hz
LED Driver	Integral
Control	Switched
Body Material	Die Cast Aluminum
Optics	Tempered Glass
IP Rating	IP66
Working Temperature	-20°C to 40°C
Rated Life	50,000Hrs (L70)

ORDER CONFORMATION

Product Code	XX	YY	ZZ
BLU-BEAM-SQL-15W	8-83CRI	27-2700K	4 - 4°
BLU-BEAM-SQL-20W	9-93CRI	30-3000K	10 - 10°
BLU-BEAM-SQL-26W		40-4000K	15 - 15°
BLU-BEAM-SQL-36W		60-6000K	20 - 20°
			30 - 30°
			60 - 60°

Example: BLU-BEAM-SQL-26W-830-10

Specification subject to change without notice